W1221 Pro Clima Typical Truss Valley Details, 20x45 Counter Battens

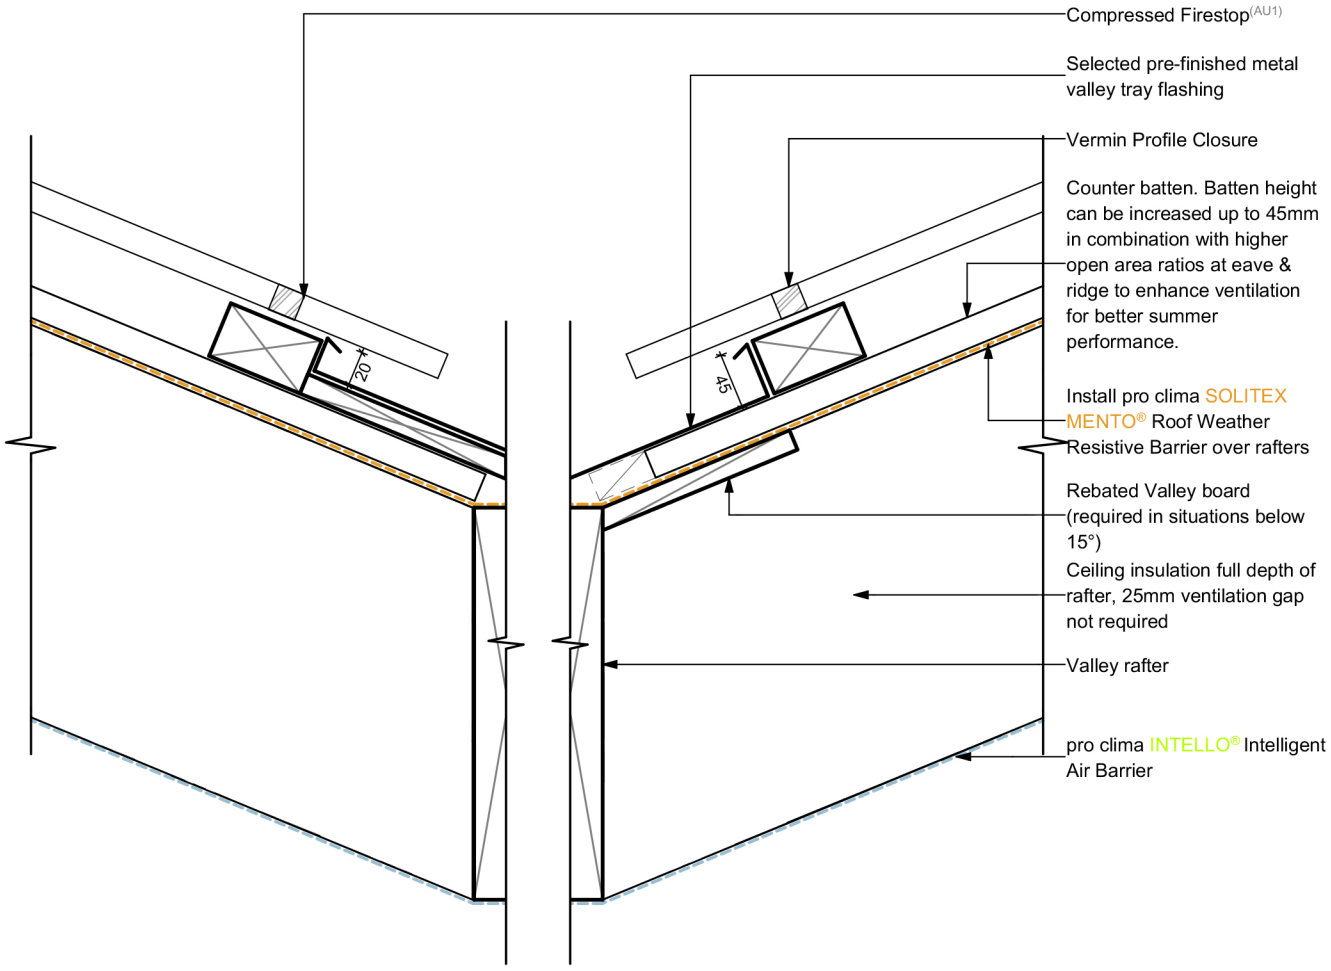

AUSTRALIA ONLY:
1: Vents/Cavity closers must meet AS 3959 requirements for bushfire protection up to BAL 40.



NOTE: Minimum 10° Pitch without rigid sheathing board

pro clima®

www.proclima.co.nz
www.proclima.com.au

Title: Truss Valley Details, 20x45 Counter Battens

ID: W1221 Issued: 09/06/2020 Revision: D

© This drawing is the property of Pro Clima NZ Ltd &/or Pro Clima Australia Pty Ltd and must not be copied without permission. This drawing is a guideline only and subject to change without notice. Thermal and hygrothermal performance should match specific design, materials and climate requirements. These can be confirmed by hygrothermal analysis using software e.g. WUFI®. Structural, fire and acoustic engineering design and the incorporation of building services (plumbing and electrical) should be signed-off by a suitably qualified engineer to ensure compliance with all health and safety requirements.